



You have profile - we move it !

elumatec GmbH & Co. KG - Pinacher Straße 61 - D 75417 Mühlacker - Lomersheim  
Tel +49 (0) 7041 14-0 - Fax +49 (0) 7041 14-280 - mail@elumatec.com - www.elumatec.com

A large, complex industrial assembly machine, likely a profile extruder or similar processing equipment, is shown in a faded, light blue color against a solid orange background. The machine consists of a tall metal frame with multiple horizontal rollers and various mechanical components. The text "Assembly- and workshop equipment" is overlaid on the machine in a white, sans-serif font.

# Assembly- and workshop equipment

## Assembly tables MST 2000 /3000

- Height adjustable
- Plastic slide rails
- Also available with brush slide rails upon request
- Easy assembly by modular system
- Horizontal frame transportation
- End stand with edge protection
- [ [Technical information MST 2000](#) ]
- Length 2.000 mm, width 1.300 mm, height horizontally adjustable 850 - 1.000 mm, weight 60 kg
- [ [Technical information MST 3000](#) ]
- Length 3.000 mm, width 1.300 mm, height horizontally adjustable 850 - 1.000 mm, weight 80 kg



[ MST 2000 ]

## Assembly sliding table MST 2045

- See MST 2000 and MST 3000, however:
- Bevelled passage, length 5.000 mm
  - [ [Technical information MST 2000](#) ]
  - Height horizontally adjustable 850 - 1.000 mm
  - Length 5.000 mm, width 1.300 mm, weight 100 kg

## Assembly tables MT 2000, MT 3000

- Stable steel construction
- Plastic slide rails
- Easy assembly by modular system
- Two storage trays for tools
- [ [Technical information MT 2000](#) ]
- Length 2.000 mm, width 1.300 mm, horizontally adjustable 850 - 1.000 mm, weight 70 kg
- [ [Technical information MT 3000](#) ]
- Length 3.000 mm, width 1.300 mm, horizontally adjustable 850 - 1.000 mm, weight 90 kg
- [ [Optional](#) ]
- Additional support
- Brush slide rails
- Compressed air supply fourfold
- Shock proof plugs twofold

## Assembly table MTA 3000

- Universal assembly table
- Extendable to all four sides
- Mushroom shape support
- Ideal for large frames
- With practical storage tray
- Low weight
- [ [Technical information](#) ]
- Length 2.200 - 4.000 mm, width 1.300 - 1.900 mm, height horizontally adjustable 850 - 1.000 mm, weight 80 kg



[ MTA 3000 ]

# Assembly and workshop equipment

Sie haben Profil - wir bewegen es !

## Lifting turntable HD 2000

- Stable steel construction
  - Ideal for gasket insertion
  - Plastic slide rails
  - Inner table pneumatic adjustable in height
  - Rotating inner table with pneumatic locking brake
  - With rubber profile support
  - Upon request also available with felt pad
- [ **Technical information** ]
- Pneumatic height adjustable inner table
  - Length 2.000 mm, width 1.300 mm, height horizontally adjustable 850 - 1.000 mm, weight 260 kg
  - Load 150 kg
- [ **Optional** ]
- Felt pads




[ HD 2000 ]

## Tilting table KT 3000

- Stable steel construction
  - Vertical frame assembly
  - Plastic slide rails
  - Pivoting roller support with steel rollers, diameter 50 mm
  - Pneumatic tilting
  - Compressed air supply fourfold
  - Access to smaller elements thanks to a gap in the table
- [ **Technical information** ]
- Length 3.000 mm, width 1.600 mm, height horizontal infinitely adjustable 850 - 1.000 mm, height vertical 1.900 mm, weight 190 kg
  - Load 150 kg
- [ **Option** ]
- Brush slide rails

## Lifting turntable HD 2500

- Possibility of accommodating two gasket rollers DW 2 or four gasket rollers DW 4
  - Four running castors, two with locking brakes
  - Adjustable to suit different gasket roll diameters
  - Storage for tools
- [ **Technical information** ]
- Length 2.500 mm, width 1.300 mm, height horizontally adjustable 850 - 1.000 mm, weight 285 kg
  - Load 150 kg

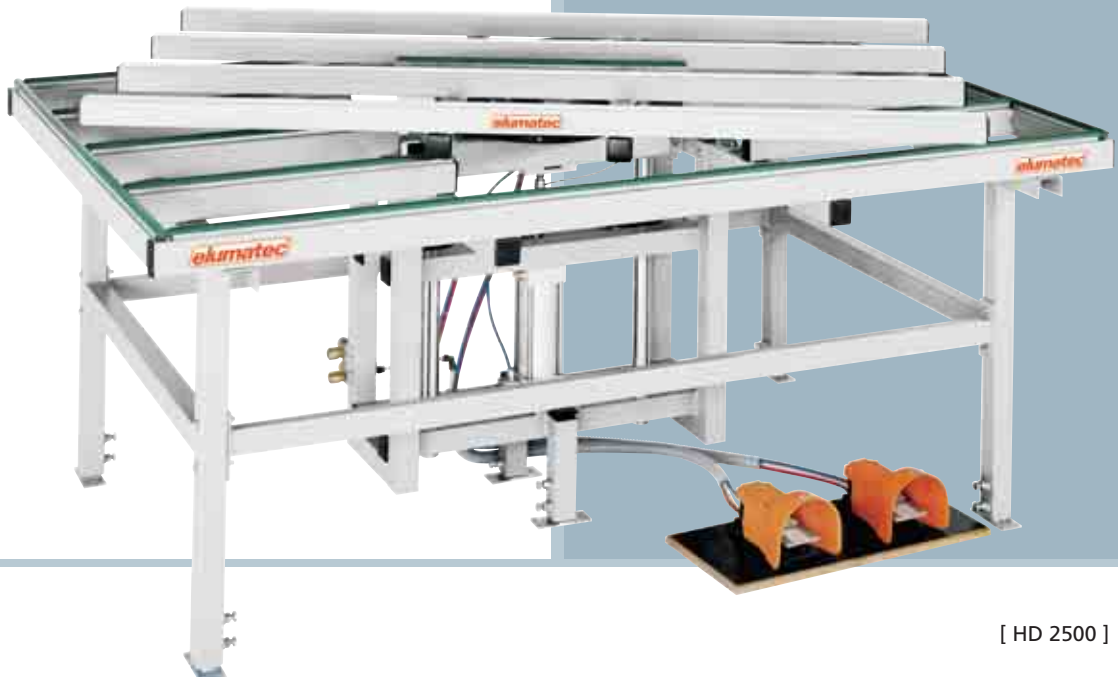

[ HD 2500 ]



[ KTH 3000 ]

## Tilting table KTH 3000

- Stable steel construction
- Vertical and horizontal frame assembly is possible
- Plastic slide rails
- Infinite height adjustment
- Length extension up to 3.000 mm
- Pivoting roller support with steel rollers, diameter 50 mm
- Two lateral material clamps
- Pneumatic tilting
- Compressed air supply fourfold

### [ Technical information ]

- Length 2.400 - 3.000 mm, width 1.600 mm, height horizontal infinitely adjustable 850 - 1.000 mm, height vertical 1.900 mm, weight 310 kg

- Load 150 kg

### [ Option ]

- Brush slide rails

## Assembly stand MS 3000

- Stable steel construction
- Vertical assembly
- Plastic slide rails
- Height adjustment by means of pneumatic cylinder 250 - 900 mm
- Two flat clamping cylinders which can be adjusted to different frame widths
- Roller support with steel rollers, diameter 50 mm

### [ Technical information ]

- Length 3.000 mm, width 950 mm, height infinitely adjustable 2.000 - 2.800 mm, weight 280 kg

- Load 150 kg



[ MS 3000 ]

# Assembly and workshop equipment

You have profile - we move it !

## Gasket trolleys DW 2, DW 4

- Accommodating two gasket rollers DW 2 or four gasket rollers DW 4
- Four running castors, two with locking brakes
- Adjustable to suit different gasket roll diameters
- Storage for tools

### [ Technical information DW 2 ]

- Length 670 mm, width 670 mm, height 1.005 mm, weight 30 kg

### [ Technical information DW 4 ]

- Length 670 mm, width 670 mm, height 1.870 mm, weight 40 kg



[ DW 2 ]

[ DW 4 ]

## Tool transport trolley WW 1000

- Three compartments with raised edges
- Four running castors, two with locking brake
- On demand with additional template board

### [ Technical information ]

- Diameter of running castors 125 mm
- Length 1.000 mm, width 500 mm, height 1.000 mm, weight 20 kg
- Load 150 kg

### [ Optional ]

- Template board

## Tool transport trolley PWS 1000

- Vertical profile transportation
- Sufficient for 30 - 40 profile bars
- Compartment height adjustable
- Four running castors, two with locking brake

### [ Technical information ]

- Eight compartments
- Distance between compartments 85 mm
- Diameter of running castors 125 mm
- Length 1.100 mm, width 900 mm, height 1.350 mm, weight 55 kg
- Load 350 kg



[ PWS 1000 ]

## Tool transport trolley PWS 2000

See PWS 1000, however:

- For 60 - 80 profile bars
- ### [ Technical information ]
- 18 Compartments
  - Length 2.000 mm, width 900 mm, height 1.350 mm, weight 55 kg
  - Load 350 kg

## Profile transport trolley PWS 4000

See PWS 2000, however:

- For 120 -160 profile bars
  - For double stacking
- ### [ Technical information ]
- 40 Compartments
  - Distance between compartments 85 mm
  - Diameter of running castors 125 mm
  - Length 2.200 mm, width 1.600 mm, height 1.900 mm, weight 200 kg
  - Load 600 kg



[ PWS 4000 ]

## Profile transport trolley PWW 1000

- Stable steel construction
- Horizontal profile transportation
- Rubber coated support arms
- Four running castors, two with locking brakes
- Six storage compartments with one centre support

### [ Technical information ]

- 11 compartments
- Distance between compartments 260 mm
- Width lower compartment 420 mm
- Width upper compartment 300 mm
- Diameter of running castors 125 mm
- Length 1.600 mm, width 900 mm, height 1.960 mm, weight 60 kg
- Load 350 kg




[ PWS 1000 ]

## Profile transport trolley PWW 2000

See PWW 1000, however:

- Six storage compartments with two centre supports
- ### [ Technical information ]
- Length 2.000 mm, width 900 mm, height 1.900 mm, weight 70 kg

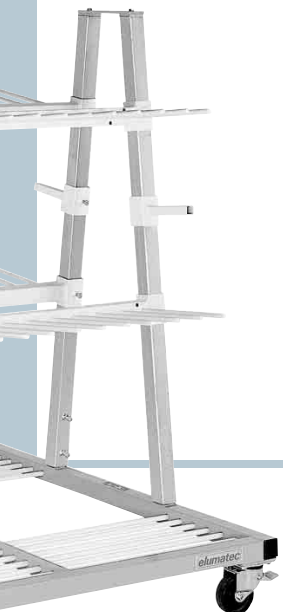

## Frame transport trolley RF 1000

- Stable steel construction
- Four running castors, two with locking brakes
- Hardwood support 22 mm thick
- Compartments for nine frames
- Compartments adjustable in height

### [ Technical information ]

- Clear width 85 mm
- Diameter of running castors 125 mm
- Length 1.100 mm, width 900 mm, height 1.500 mm, weight 65 kg
- Load 400 kg



[ RF 1000 ]

## Glass transport trolley GF 1000

- Stable steel construction
- Four running castors, two with locking brakes
- Hardwood support 22 mm thick
- Compartments for 20 glass units
- Compartments adjustable in height
- Ideal for sorting of glass

### [ Technical information ]

- Clear width 30 mm
- Diameter of running castors 125 mm
- Length 1.050 mm, width 900 mm, height 1.400 mm, weight 65 kg
- Load 400 kg



[ GF 1000 ]

# Assembly and workshop equipment

You have profile - we move it !

## Commissioning trolley KW 1

- For inside or outside factory use
- Four running castors, two with locking brakes
- Profile support with rubber covering
- [ **Technical information** ]
- Diameter of running castors 125 mm
- Length 1.600 mm, width 950 mm, height 1.600 mm, weight 100 kg
- Load 400 kg



[ KW 1 ]

## Commissioning trolley KW 3

- Possibility of space saving storing
- [ **Technical information** ]
- Length 1.600 mm, width 900 mm, height 1.600 mm, weight 80 kg
- Load 400 kg



[ KW 3 ]

## Commissioning trolley KW 2

- Lashing strap holders
- Hooking facility for crane transportation
- [ **Technical information** ]
- Length 2.000 mm, width 1.100 mm, height 1.900 mm, weight 160 kg
- Load 500 kg



[ KW 2 ]

## Reinforcement profile transport trolley AW 800

- Vertical storage of steel profiles
  - Clear profile arrangement for fixed lengths
  - Minimum space required
  - Four running castors, two with locking brake
- [ **Technical information** ]
- Diameter of running castors 125 mm
  - Length 800 mm, width 600 mm, height 1.000 mm, weight 20 kg
  - Load 400 kg



[ AW 800 ]

## Hardware trolley BW 7300

- See BW 7002, however:
- Punching press and measuring system
- [ **Technical information** ]
- Diameter of running castors 125 mm
  - Length 1.100 mm, width 700 mm, height 1.100 mm, weight 80 kg
  - Load 300 kg



[ BW 7300 ]

## Hardware trolley BW 7002

- Stable steel construction
  - Two compartments made of wood
  - Four running castors, two with locking brake
  - Device for installing a punching press
- [ **Technical information** ]
- Diameter of running castors 125 mm
  - Length 1.100 mm, width 700 mm, height 1.100 mm, weight 20 kg
  - Load 300 kg



[ BW 7002 ]



# Assembly and workshop equipment


You have profile - we move it !

## Checking and glazing unit VE 3050 - Monobloc

- Suitable for monobloc profiles
- Optimum in stability and accuracy due to parallel clamping bars
- Exact rectangular window checking due to toothed rack clamping
- Operating elements are integrated into clamping bar
- Gap for window drip bar
- Clamping bars in every position
- Infinitely adjustment in height
- Surface for tools

### [ Technical information ]

- Clamping width 2.900 mm
- Clamping height 2.300 mm
- Height adjustable 500 mm
- Stand height 2.000 - 2.500 mm
- Clamping bar height 2.300 - 2.800 mm
- Clamping bar width 160 mm
- Load 150 kg
- Length 3.500 mm, width 950 mm, height infinitely adjustable 850 - 1.000 mm, weight 300 kg

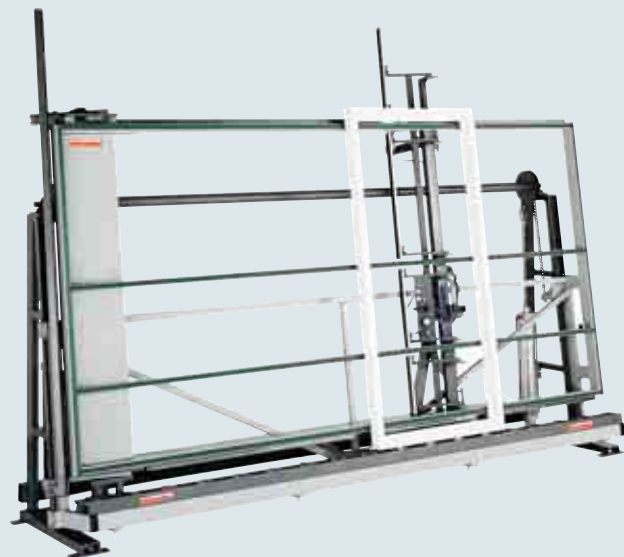

[ VE 3050 ]

## Checking and glazing unit VE 3000

- Fast and exact assembly of windows, doors and elements
- Accuracy thanks to parallel clamping bars
- Gap for window drip bar
- Optimum in stability
- Support for tools
- Pneumatic centering
- Infinitely adjustment in height

### [ Technical information ]

- Clamping width 2.800 mm
- Clamping height 2.300 mm
- Stand height 2.000 - 2.500 mm
- Clamping bar height 2.300 - 2.800 mm
- Load 150 kg
- Length 3.150 mm, width 850 mm, height 2.000 mm, weight 280 kg



[ VE 3000 ]

## Vertical roller conveyor VR 2000

- Stable steel construction
- Extendable in modular design system
- Length of each roller conveyor unit 2.000 mm
- Plastic slide rails upper and lower, as well as at infeed and off - loading position
- End stand with edge protection
- Continuous support rollers
- Two roller tracks, diameter 48 mm on ball bearings, division 50 mm

### [ Technical information ]

- Basic unit without end stand
- Support roller width 500 mm
- Load 150 kg
- Length 2.000 mm, width 900 mm, height 1.600 mm, weight 80 kg
- End stand 20 kg

### [ Optional ]

- End stops
- End stands



## Vertical roller conveyor VR 2005

See VR 2000, however:

- Roller conveyor fivefold divided

[ **Optional** ]

- Double end stops

## Horizontal roller conveyor HR 2000

- Stable steel construction
- Extendable in modular design system
- Length of each roller conveyor unit 2.000 mm without end stand
- Continuous support rollers
- Plastic slide rails at infeed and off - loading
- End stand with edge protection
- Height adjustable
- Track rows sixfold

[ **Technical information** ]


- Basic unit without end stand
- Roller diameter 48 mm, on ball bearings, division 50 mm
- Length 2.000 mm, width 1.300 mm, horizontally adjustable 850 mm - 1.000 mm, weight 80 kg

[ **Optional** ]

- End stops



[ HR 2000 ]

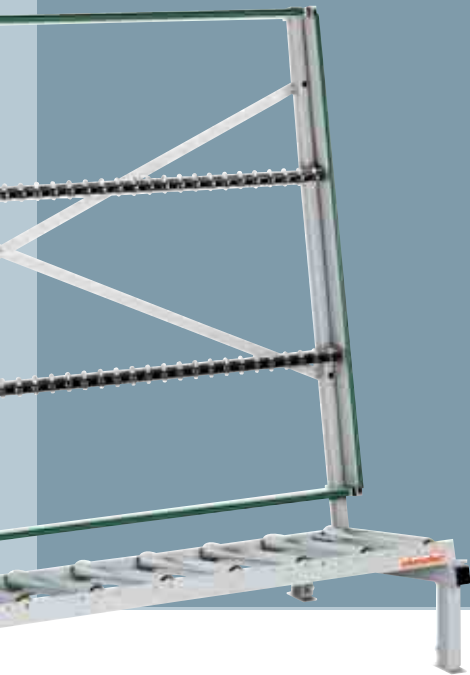

[ VR 2000 ]

## Turntable DT 1000

- Four pivoting and infinitely adjustable support arms, rubber coated
- Table can be rotated 360° and be clamped with foot pedal at any position

[ **Technical information** ]

- Height adjustable 850 - 1.000 mm, weight 70 kg



[ DT 1000 ]

## Steel column S 3000


- Steel column to fix the appliance holder
- Base plate for fixing to the floor at any location

[ **Technical information** ]

- Height of stand 3.000 mm
- Mounting height arm 2.400 mm
- Height of support plate 1.350 mm
- Base plate 400 x 400 mm

## Appliance holder G 3000

- Mounting on wall or steel column
- Movable support device for tools and compressed air units which enables better working conditions
- No air tubes on the ground
- Standard equipped with two spiral tubes (without tools)
- With air filter and compressed air connection tube

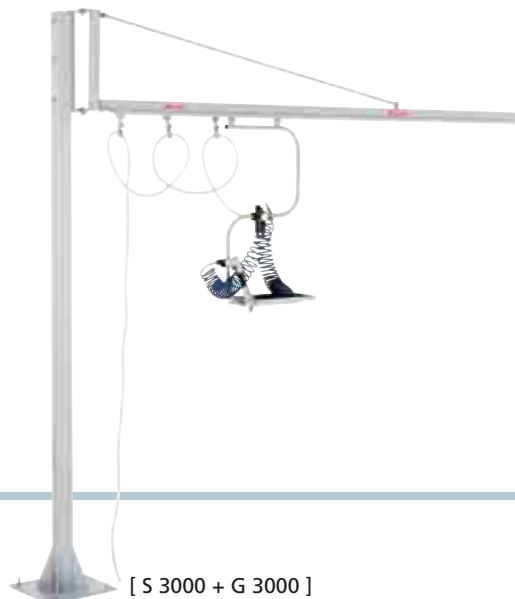

[ S 3000 + G 3000 ]