

[Only Quality produces Quality]

[Werkstatt - und Montageeinrichtungen]

Assembly tables

Assembly trolleys

Compressors

Tooling



elumatec GmbH & Co. KG

> Pinacher Straße 61
> D 75417 Mühlacker - Lomersheim
> Fon +49 (0) 7041 14-0
> Fax +49 (0) 7041 14-280

> mail@elumatec.de
> www.elumatec.com

[You have profile - we move it !]

© 05/2007

[The right to make alterations is reserved]

elumatec[®]

Assembly stands MB 2000

- > Stable steel construction
- > Plastic slide - rail surface
- > Easily assembled by building block system
- [**Technical information**]
- > Adjustable height 850 - 1.000 mm
- > Length 2.000 mm, width (stand) 700 mm, weight 20 kg per unit

Turn table DT 1000

- > 4 pivotable and infinitely extendable support arms
- > Table can be rotated 360° and be clamped with foot pedal at any position
- [**Technical information**]
- > Adjustable height 850 - 1.000 mm, weight 70 kg

Assembly table MT 2000/3000

- > Stable steel construction
- > Plastic slide - rail surface
- > Easily assembled by building block system
- > 2 storage trays for tools
- [**Technical information**]
- > Adjustable height 850 - 1.000 mm
- > Length 2.000 mm/3.000 mm, width 1.300 mm, weight 70/90 kg
- [**Optional**]
- > Additional support
- > Brush slide rails
- > Compressed air supply, fourfold
- > Shock proof plugs, twofold

Assembly table MTA 3000

- > Universal assembly table
- > Extendable to all four sides
- > Mushroom shape support
- > Ideal for large frames
- > With practical storage tray
- > Low weight
- [**Technical information**]
- > Height horizontally adjustable 850 - 1.000 mm
- > Length 2.200 - 4.000 mm, width 1.300 - 1.900 mm, weight 80 kg

Tilting table KTH 3000

- > Stable steel construction
- > Vertical and horizontal frame assembly is possible
- > Plastic slide rails
- > Infinite height adjustment
- > Length extension up to 3.000 mm
- > Pivoting roller support with steel rollers, diameter 50 mm
- > 2 lateral material clampings
- > Pneumatic tilting
- > Compressed air supply, fourfold
- [**Technical information**]
- > Height horizontal infinitely adjustable 850 - 1.000 mm, height vertical 1.900 mm
- > Length 2.400 - 3.000 mm, width 1.600 mm, weight 310 kg
- > Load 150 kg
- [**Optional**]
- > Brush slide rails

Profile transport trolley PWS 1000

- > Vertical profile transportation
- > Sufficient for 30 – 40 profile bars
- > Compartment height adjustable
- > 4 running castors, 2 with locking brake
- [**Technical information**]
- > 8 compartments
- > Distance between compartments 85 mm
- > Diameter of running castors 125 mm
- > Length 1.100 mm, width 900 mm, height 1.350 mm, weight 55 kg
- > Load 350 kg


Sealing gasket trolleys DW 2, DW 4

- > Accommodating 2 gasket reels DW 2 or 4 gasket reels DW 4
- > 4 running castors, 2 with locking brakes
- > Adjustable to suit different gasket reel diameters
- > Storage for tools
- [**Technical information**]
- > Length 670 mm, width 670 mm, height 1.005/1.870 mm, weight 30/40 kg



[MTA 3000]

flexible]



Workshop and assembly equipment]



[MB 2000]



[DT 1000]



[MT 2000]



[PWS 1000]



[DW 2]




[DW 4]



[KTH 3000]

Profile transport trolley PWW 1000

- > Stable steel construction
- > Horizontal profile transportation
- > Rubber coated support arms
- > 4 running castors, 2 with locking brakes
- > 6 support arms
- [**Technical information**]
- > Length 1.600 mm, width 900 mm, height 1.960 mm, weight 60 kg
- > Load 350 kg
- > Distance between compartments 260 mm
- > Width lower compartment 420 mm
- > Width upper compartment 150 mm

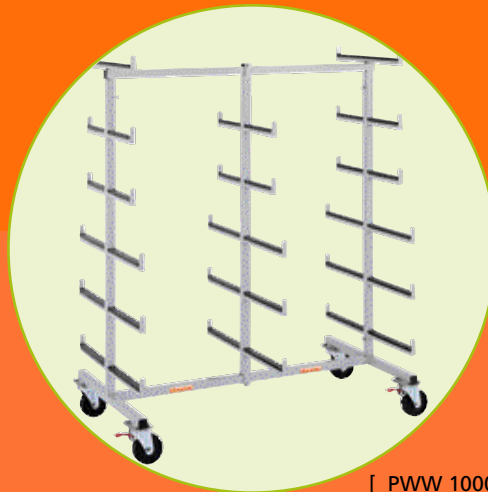

[PWW 1000]

Commissioning trolley KW 1

- > For inside or outside factory use
- > 4 running castors, 2 with locking brakes
- > Profile support with rubber covering
- > Hooks for crane transportation
- [**Technical information**]
- > Length 1.600 mm, width 950 mm, height 1.600 mm, weight 100 kg
- > Load 400 kg



[Compressor]



[KW 1]



Compressor ST 670 - 270

- > Container volume 270 l
- > Suction capacity 670 l/min.
- > Power output 4 kW
- > Compressed air supply 10 bar
- [**Optional**]
- > Compressed air dryer

Compressor ST 960 - 500

- > Container volume 500 l
- > Suction capacity 960 l/min.
- > Power output 5,5 kW
- [**Optional**]
- > Star delta starter
- > Compressed air dryer

Tandemcompressor ST 860 - 500

- > Container volume 500 l
- > Suction capacity 2 x 860 l/min.
- > Power output 2 x 5,5 kW
- > Compressed air supply 10 bar
- [**Optional**]
- > Star delta starter
- > Compressed air dryer

Hand tools

- (01) Gasket scissors 2 x 45°
- (02) Gasket scissors 90°
- (03) Gasket scissors 180°
- (04) Pneumatic screwdriver
- (05) Magnetic holder with set of screwdriver bits
- (06) Pneumatic pistol drill
- (07) Set of drills
- (08) Air gun
- (09) Finger cutter HSS
- (10) Spiral tube 2.500 mm
- (11) Chisel ST 4
- (12) Soft hammer
- (13) Glazing lever
- (14) Glass suction pad (double)
- (15) Glass suction pad (single)

