



[Only Quality produces Quality]

[C o r n e r c r i m p e r s]

**Four-head corner
crimper EP 424**

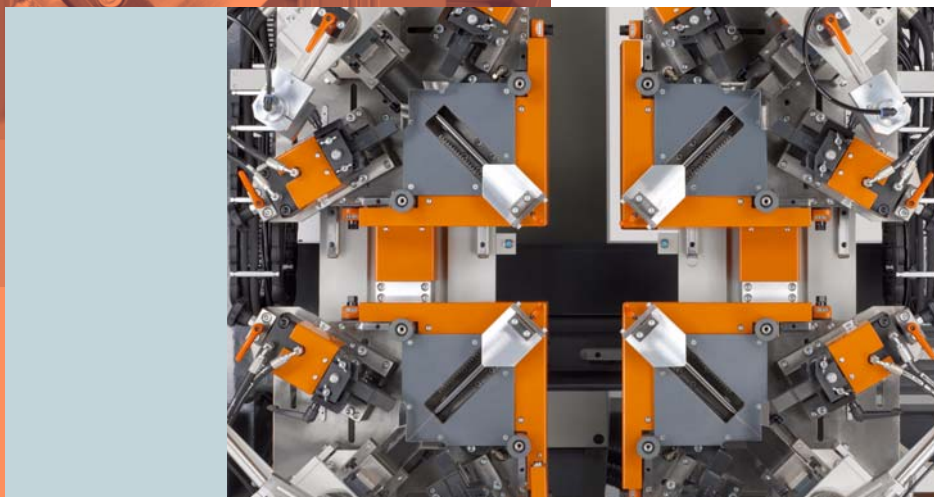

elumatec GmbH & Co. KG

>Pinacher Straße 61
>D 75417 Mühlacker - Lomersheim
>Telefon +49 (0) 7041 14-0
>Telefax +49 (0) 7041 14-280

>mail@elumatec.de
>www.elumatec.com

[You have profile - we connect it !]





Four-head corner crimper EP 424

> Better handling:

The vertical configuration of the machine facilitates enormously the handling of pre-assembled and completely crimped elements

> Fast and precise:

Simultaneous hydraulic crimping of all 4 corners. The profiles of one complete element are crimped together in one operation. The crimping heads can be positioned exactly by a 3-axis control (both vertical axis are working synchronously) and the depth of each crimping head is individually adjustable with a hand wheel

> Control options:

The crimping positions can be programmed either by the user-friendly display control E 190 or by the optionally available IPC display control E 290. The E 290 control is based on an industrial PC where offset dimensions, set of press blades and profile data can be administrated in one data base

[Technical information]

- > 3-axis control
- > Crimping height 100 mm
- > Frame size min. 550 x 550 mm
- > Frame size max. depending on the model
3.000 mm x 1.500 mm, 4.000 mm x 1.500 mm,
3.000 mm x 2.500 mm, 4.000 mm x 2.500 mm
- > Crimping force 25 kN (hydraulic)
- > Power supply 230/400 V, 3~, 50 Hz
- > Power output 6 kW
- > Compressed air supply 6-8 bar
- > Air consumption per working cycle 10 l

[Optional]

- > Support blocks
- > Press blades and adjusting spindles
- > PC control E 290
- > Barcode scanner (only available with PC control E 290)

